
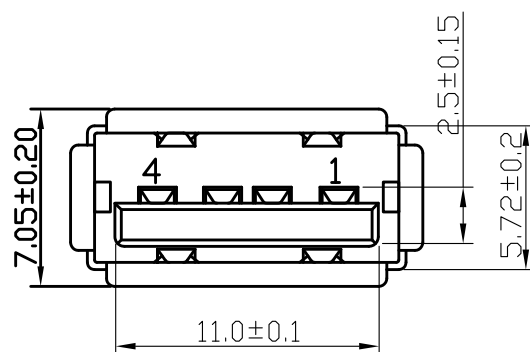
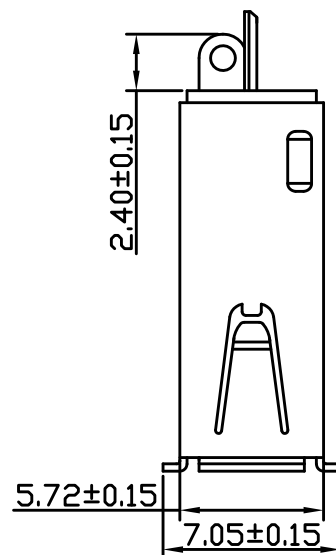


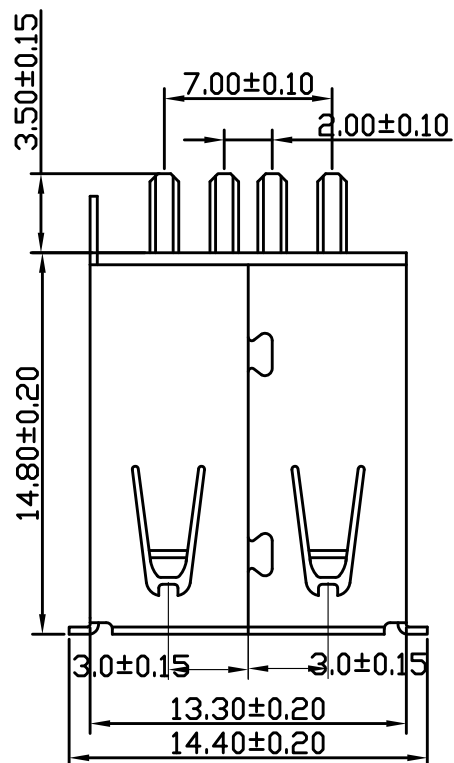

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Copper alloy, $t=0.25\text{mm}$.
- 1.3 Shell: Copper alloy, $t=0.30\text{mm}$.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.02 Kgf Min.
- 2.7 Temperature range: $-55^{\circ}\text{C}\sim+105^{\circ}\text{C}$

3.Finishes:

- 3.1 contacts:Gold flashed.
- 3.2 Shell: Nickel plated.

3	Shell	1	Copper alloy	$T=0.30\text{mm}$	Nickel Plated
2	Contact	4	Copper alloy	$T=0.25\text{mm}$	Gold Flashed
1	Housing	1	P.B.T	UL 94-V0	Black/Ivory
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

GENERAL TOLERANCE

.X ± 0.30
.XX ± 0.20
.XXX ± 0.10

SIZE

A4

REV.


0

DRAWN

Sam

DATE

FEB/09/11



UNIT:mm

DESCRIPTION:

USB Connector A type
4p female solder type (RoHS)

PRODUCT NO.

XUSB-008S

FILE NAME.

XMULTIPLE
Technologies, Inc.